

1976–1986 CJ7 , 1987–1995 Jeep Wrangler YJ Hardtop with Full Doors
Installation Instructions

PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION

To safely lift and install this hardtop, you will need the assistance of at least one other person.

WARNING

The top on this vehicle is designed only for additional protection against the elements.

Do not rely on the top to contain occupants within the vehicle or to protect against intrusion of foreign objects, nor injury during an accident.

Make sure all brackets and screws are tight. Periodically check for tightness and retighten when necessary.

WEAR SEAT BELTS AT ALL TIMES

Parts included in the installation kit

6 each	Bolts	5/16 x 18 x 1 1/4
6 each	Nuts	5/15 x 18
6 each	Washers	5/15
2 each	Windshield Clips	

Follow the instructions and perform the steps in the sequence given. Short cuts to the directions may result in an unsatisfactory installation.

1. Perform Jeep Pre–installation Checks
2. Install Hardtop

Jeep CJ7 and Jeep YJ Hardtop Installation Instructions



1. Remove soft top moldings around tub.



4. Remove soft top corner moldings.



2. Remove soft top moldings around tub.




5. Remove soft top rear moldings.



3. Remove soft top molding above windshield.



6. Attach tape to windshield frame.

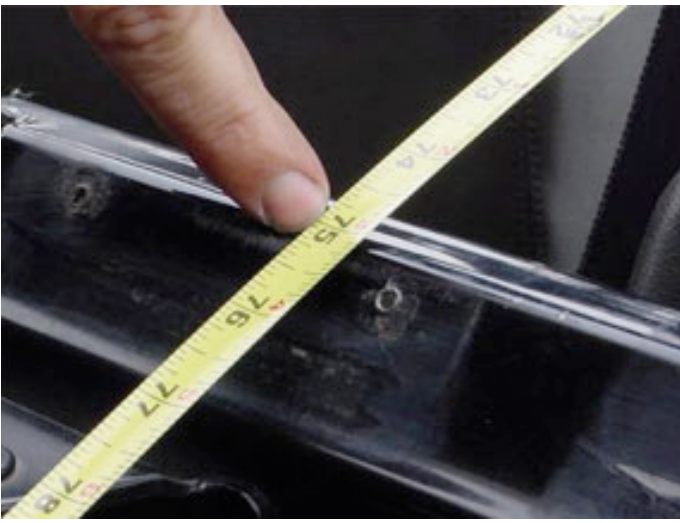

- 7. It should touch at 75 1/8".**
(see enclosed pre-install instructions)



- 10. Install the 4 washers and bolts. Tighten down with supplied nut plates.**



- 8. Using two people, install the hardtop.**



- 11. Attach catch clip under visor.**



- 9. Adjust hardtop on body.**



- 12. Adjust cam-lok to medium tension and lock.**

Enjoy!!

Jeep Pre-Installation Instructions



1. Place your tape on top ledge of the windshield.



2. Extent the tape to the rear of the body.



3. Where the tape hits the body, it should read the value in the chart below. Measure both sides. If it does, put the top on. If not, go to step 4.



4. CJ 5 Loosen the bolts and wing nut. Adjust windshield and tighten.



4. CJ7 - CJ 8 - YJ Loosen bolts using a T40 torx wrench. Go to step 5.



4. TJ & Unlimited Using a T40 Torx wrench, loosen the bolt above the doors hinge. Go to step 5.

5. Using a T50 tamper resistant Torx wrench or vise-grips, loosen this bolt. On the CJ 7 & YJ's it's on the top of the roll bar. On the TJ & Unlimited it's on the side of the roll bar. This will be a 2 person job. One checks the measurement, the other person tightens the bolt. Remember 75 1/8" on both sides. (Unlimited 89 7/16"). Once this is accomplished, tighten up the bolt you loosened in step 4. Now you can put your top on. If the windshield is properly adjusted, the space between the windshield and the door should be the same on both sides.

CJ 5 (1972-1975)	70 3/4"
CJ 5 (1976-1983)	67 1/4 "
CJ 7 & YJ	75 1/8"
CJ 8	97 11/16"
TJ	75 1/8"
Unlimited	89 7/16"